


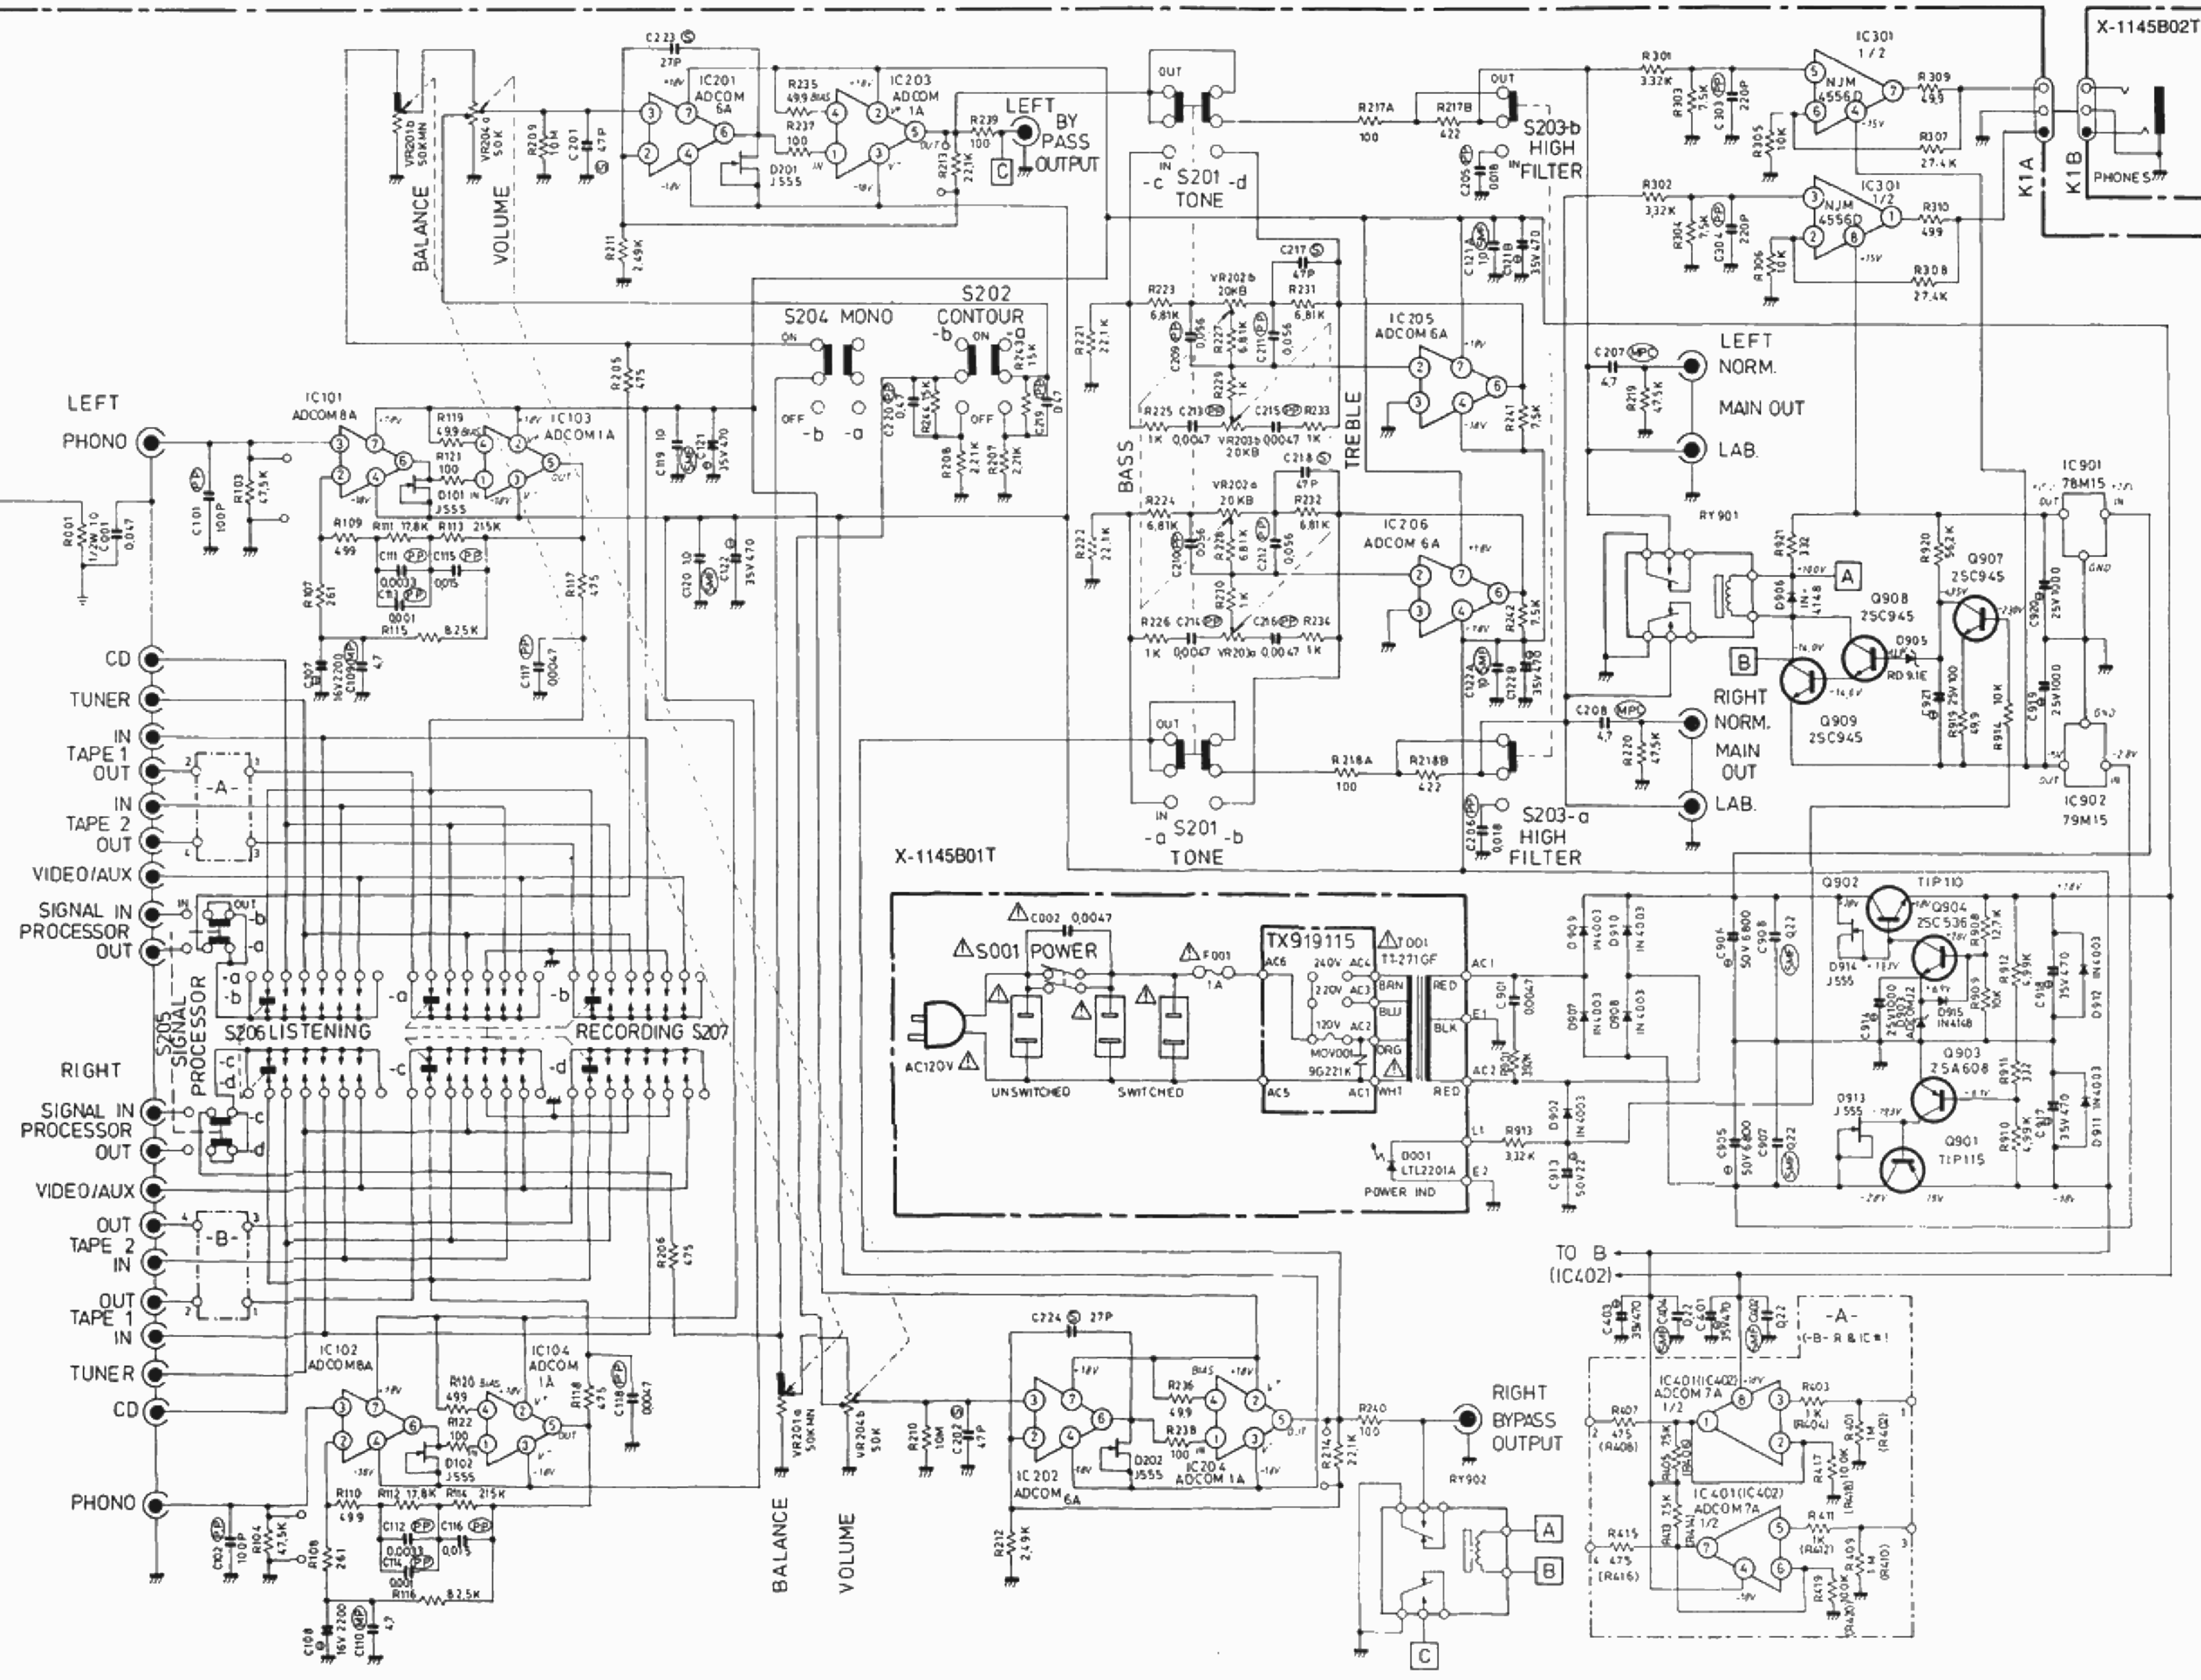

• 25C945
• 25C536
• 25A608K

• TIP115
• TIP110

• 78M15
• 79M15

• ADCOM 6A
• ADCOM 7A
• ADCOM 8A
• NUM 4556 D

INSTRUCTIONS FOR SERVICING PERSONNEL:

1. USE ONLY REPLACEMENT PARTS THAT HAVE THE CRITICAL CHARACTERISTICS RECOMMENDED BY MANUFACTURER.
2. MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE AC SUPPLY CIRCUIT BEFORE RETURNING THE UNIT TO THE CUSTOMER.

